



# R50-3G-30F2-00

## Flange Resistor 30 Watts, 50 $\Omega$

### Electrical Specs

Resistance Value ( $\Omega$ ) :	50, $\pm 2\%$
Frequency range (MHz) :	DC-3000
Power (Watts) :	30
VSWR :	1.12 : 1


### Mechanical Specs

Flange Style :	2 Holes
Flange Size WxLxT (mm.) :	4.7 x 18.0 x 1.0
Tab width/Thickness (mm.) :	1.0/0.150
Tab Height (mm.) :	2.0
Mounting Hole Dia.(mm.) :	2.2
Distance between Holes (mm.) :	13.0



### Environment & Others

Operating Temp. :	-55°C to + 150°C
Resistive Element :	Thick film
Substrate :	BeO
Cover :	Al <sub>2</sub> O <sub>3</sub>
Mounting Flange :	Copper, nickel plated
Lead :	Silver or Copper

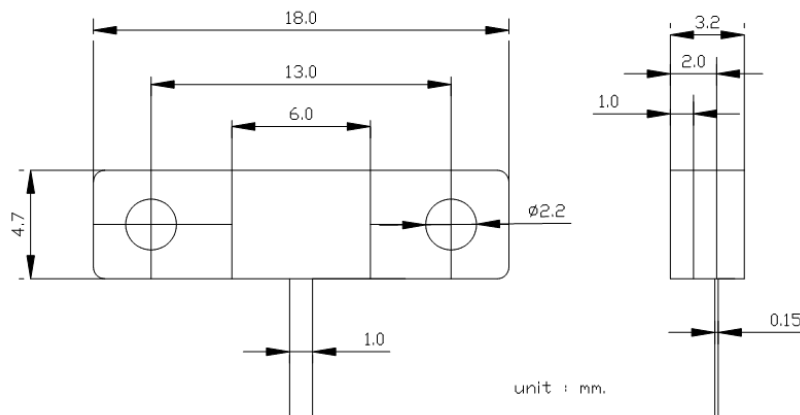

## AEROCOMM Co., Ltd.

89 & 89/1 Intamara 41, Sutthisarn Road, Dindaeng, Bangkok 10400 THAILAND

Tel : (662) 6938300 - 2, (662) 6937880 - 1 Fax : (662) 6938304

Email : [aerocomm@aerocommthailand.com](mailto:aerocomm@aerocommthailand.com) Website : [www.aerocommthailand.com](http://www.aerocommthailand.com)

Specifications contained herein are subject to change without notice. AeroComm Co., Ltd. assumes no liability for the use of this information.